

SERVING THE MARINE INDUSTRY SINCE 1947



ROPE & CORDAGES
PRODUCT LINE

3-STRAND POLYPROPYLENE ROPE MONOFILAMENT



Polypropylene is a lightweight and strong general purpose rope. It is rot proof and unaffected by water, oil, gasoline, and most chemicals. Polypropylene floats yet it is twice as strong as manila. Our regular monofilament polypropylene rope is made with a medium lay, allowing for easy splicing. Harder lay pot warp which is ideal for fishing applications is also available.

Categories: Ropes and Cordages, 3-Strand Polypropylene Rope Monofilament

Key Features

Yellow, Black, Tan, International Orange, Red, Red with Orange Tracer, White, Blue, Blue/ White, Black with Orange Tracer

Additional sizes and colors available to special order

Standard reels of 300 ft., 600 ft., 1,200 ft. and 2,400 ft.

Part #	Special Type	Diameter	Length	Color	Working Load Limits Range (WLL) (lbs.)	
					Min	Max
PPM1/83		1/8"	3,000'	Yellow	41	98
PPM3/16250		3/16"	250'	Yellow	54	130
PPM3/16		3/16"	600'	Yellow	54	130
PPM3/1612		3/16"	1,200'	Yellow	54	130
PPM3/163		3/16"	3,000'	Yellow	54	130
PPM3/1636		3/16"	3,600'	Yellow	54	130
PPM1/41C		1/4"	100'	Yellow	94	225
PPM1/4300		1/4"	300'	Yellow	94	225
PPM1/4		1/4"	600'	Yellow	94	225
PPM1/412		1/4"	1,200'	Yellow	94	225
PPM1/424		1/4"	2,400'	Yellow	94	225
PPM1/43		1/4"	3,000'	Yellow	94	225
PPM1/44		1/4"	4,000'	Yellow	94	225
PPM5/16		5/16"	600'	Yellow	143	342
PPM5/1612		5/16"	1,200'	Yellow	143	342
PPM3/850C		3/8"	50'	Yellow	203	486
PPM3/8300		3/8"	300'	Yellow	203	486
PPM3/8		3/8"	600'	Yellow	203	486
PPM3/812		3/8"	1,200'	Yellow	203	486
PPM3/824		3/8"	2,400'	Yellow	203	486

Part #	Special Type	Diameter	Length	Color	Working Load Limits Range (WLL) (lbs.)	
					Min	Max
PPM7/16		7/16"	600'	Yellow	263	630
PPM1/23		1/2"	300'	Yellow	315	756
PPM1/2		1/2"	600'	Yellow	315	756
PPM1/212		1/2"	1,200'	Yellow	315	756
PPM1/224		1/2"	2,400'	Yellow	315	756
PPM5/8		5/8"	600'	Yellow	465	1,116
PPM5/824		5/8"	2,400'	Yellow	465	1,116
PPM3/4		3/4"	600'	Yellow	638	1,530
PPMTR1/4	Tiger Rope	1/4"	600'	Yellow/ Yellow/ Black	94	225
PPMTR5/16	Tiger Rope	5/16"	600'	Yellow/ Yellow/ Black	143	342
PPMTR3/8	Tiger Rope	3/8"	600'	Yellow/ Yellow/ Black	203	486
PPMTR7/16	Tiger Rope	7/16"	600'	Yellow/ Yellow/ Black	263	630
PPMTR1/2	Tiger Rope	1/2"	600'	Yellow/ Yellow/ Black	315	756
PPMTR5/8	Tiger Rope	5/8"	600'	Yellow/ Yellow/ Black	465	1,116
PPMTR3/4	Tiger Rope	3/4"	600'	Yellow/ Yellow/ Black	638	1,530
PPMB3/16		3/16"	600'	Black	54	130
PPMB3/1612		3/16"	1,200'	Black	54	130
PPMB1/4		1/4"	600'	Black	94	225
PPMB1/412		1/4"	1,200'	Black	94	225
PPMB5/16		5/16"	600'	Black	143	342

3-STRAND POLYPROPYLENE ROPE MONOFILAMENT

Part #	Special Type	Diameter	Length	Color	Working Load Limits Range (WLL) (lbs.)	
					Min	Max
PPMB5/1612		5/16"	1,200'	Black	143	342
PPMB3/8		3/8"	600'	Black	203	486
PPMB3/812		3/8"	1,200'	Black	203	486
PPMB3/824		3/8"	2,400'	Black	203	486
PPMB1/2		1/2"	600'	Black	315	756
PPMB5/8		5/8"	600'	Black	465	1,116
PPMB3/4		3/4"	600'	Black	638	1,530
PPMB7/8		7/8"	600'	Black	863	2,070
PPMB7/815		7/8"	1,500'	Black	863	2,070
PPMB1		1"	600'	Black	1,069	2,565
PPMT5/8		5/8"	600'	Tan	465	1,116
PPMT3/4		3/4"	600'	Tan	638	1,530
PPMT1		1"	600'	Tan	1,069	2,565
PPMT1-1/4		1-1/4"	600'	Tan	1,613	3,870
PPMT1-1/2		1-1/2"	600'	Tan	2,279	5,470
PPMT2		2"	600'	Tan	3,900	9,360
PPMIO1/4		1/4"	600'	International Orange	94	225
PPMIO5/16		5/16"	600'	International Orange	143	342
PPMIO3/8		3/8"	600'	International Orange	203	486
PPMIO1/2		1/2"	600'	International Orange	315	756
PPMIO5/8		5/8"	600'	International Orange	465	1,116
PPMIO3/4		3/4"	600'	International Orange	638	1,530
PPMIO1		1"	600'	International Orange	1,069	2,565
PPM1/4R		1/4"	600'	Red	94	225
PPMR3/8		3/8"	600'	Red	286	686
PPM1/2R		1/2"	600'	Red	315	756
PPMR5/8		5/8"	600'	Red	465	1,116
PPMRCT1/2	California Truck Rope	1/2"	600'	Red with Orange Tracer	315	756
PPMW3/1612		3/16"	1,200'	White	54	130
PPMW1/4		1/4"	600'	White	94	225
PPMW1/412		1/4"	1,200'	White	94	225

Part #	Special Type	Diameter	Length	Color	Working Load Limits Range (WLL) (lbs.)	
					Min	Max
PPMW5/16		5/16"	600'	White	143	342
PPMW3/8		3/8"	600'	White	203	486
PPMW3/812		3/8"	1,200'	White	203	486
PPMW1/2		1/2"	600'	White	315	756
PPMW5/8		5/8"	600'	White	465	1,116
PPMW3/4		3/4"	600'	White	638	1,530
PPMBLU1/4		1/4"	600'	Blue	94	225
PPMBLU3/8		3/8"	600'	Blue	203	486
PPMBLU1/2		1/2"	600'	Blue	315	756
PPMBL5/8		5/8"	600'	Blue	465	1,116
PPMBLU3/4		3/4"	600'	Blue	638	1,530
PPMBLU1		1"	600'	Blue	1,069	2,565
PPM1/2G		1/2"	600'	Green	315	756
PPMBW1/2	Pool Rope	1/2"	600'	Blue/ White	315	756
PPM3/43BWW	Pool Rope	3/4"	300'	Blue/ White	638	1,530
PPM3/4BWW	Pool Rope	3/4"	600'	Blue/ White	638	1,530
PPMCT1/450	California Truck Rope	1/4"	50'	Black with Orange Tracer	94	225
PPMCT1/4100	California Truck Rope	1/4"	100'	Black with Orange Tracer	94	225
PPMCT3/8100	California Truck Rope	3/8"	100'	Black with Orange Tracer	203	486
PPMCT3/8	California Truck Rope	3/8"	600'	Black with Orange Tracer	203	486
PPMCT3/812	California Truck Rope	3/8"	1,200'	Black with Orange Tracer	203	486
PPMCT7/16	California Truck Rope	7/16"	600'	Black with Orange Tracer	263	630
PPMCT1/2	California Truck Rope	1/2"	600'	Black with Orange Tracer	315	756
PPMCT1/212	California Truck Rope	1/2"	1,200'	Black with Orange Tracer	315	756
PPMCT5/8	California Truck Rope	5/8"	600'	Black with Orange Tracer	465	1,116
PPMCT3/4	California Truck Rope	3/4"	600'	Black with Orange Tracer	638	1,530
PPMCT1	California Truck Rope	1"	600'	Black with Orange Tracer	1,069	2,565



3-STRAND POLYPROPYLENE ROPE FILM



Polypropylene is a lightweight and strong general purpose rope. It is rot proof and unaffected by water, oil, gasoline, and most chemicals. Polypropylene floats yet it is twice as strong as manila. Our regular film polypropylene rope is made with a medium lay, allowing for easy splicing. Harder lay pot warp which is ideal for fishing applications is also available.

Categories: Ropes and Cordages, 3-Strand Polypropylene Rope Film

Key Features

Available colors: Yellow, Yellow/Yellow/Black, Black, Red/White/Blue, White, Tan

Additional sizes and colors available to special order

Standard reels of 300 ft., 600 ft., and 1,200 ft.

3/16" through 3/4" on reels

Part #	Diameter	Length	Color	Working Load Limits Range (WLL) (lbs.)	
				Min	Max
PPF3/16	3/16"	600'	Yellow	54	130
PPF3/1612	3/16"	1,200'	Yellow	54	130
PPF3/1636	3/16"	3,600'	Yellow	54	130
PPF1/4	1/4"	600'	Yellow	94	225
PPF1/412	1/4"	1,200'	Yellow	94	225
PPF5/16	5/16"	600'	Yellow	143	342
PPF3/8	3/8"	600'	Yellow	203	486
PPF3/825	3/8"	2,500'	Yellow	203	486
PPF3/836	3/8"	3,600'	Yellow	203	486
PPF1/2	1/2"	600'	Yellow	315	756
PPF5/8	5/8"	600'	Yellow	465	1,116
PPF3/4	3/4"	600'	Yellow	638	1,530
PPFY13	1"	300'	Yellow	1,069	2,565
PPF1-1/4Y	1-1/4"	600'	Yellow	1,613	3,870
PPF7/8	7/8"	600'	Yellow/ Yellow/ Black	863	2,070
PPF13	1"	300'	Yellow/ Yellow/ Black	1,069	2,565
PPF1	1"	600'	Yellow/ Yellow/ Black	1,069	2,565
PPF1-1/8	1-1/8"	600'	Yellow/ Yellow/ Black	1,333	3,200
PPF1-1/4	1-1/4"	600'	Yellow/ Yellow/ Black	1,613	3,870
PPF1-1/2	1-1/2"	600'	Yellow/ Yellow/ Black	2,279	5,470
PPF1-5/8	1-5/8"	600'	Yellow/ Yellow/ Black	2,663	6,390

Part #	Diameter	Length	Color	Working Load Limits Range (WLL) (lbs.)	
				Min	Max
PPF1-3/4	1-3/4"	600'	Yellow/ Yellow/ Black	3,075	7,380
PPF23	2"	300'	Yellow/ Yellow/ Black	3,900	9,360
PPF2	2"	600'	Yellow/ Yellow/ Black	3,900	9,360
PPF2-1/4	2-1/4"	600'	Yellow/ Yellow/ Black	4,950	11,880
PPF2-1/23	2-1/2"	300'	Yellow/ Yellow/ Black	6,000	14,400
PPF2-1/2	2-1/2"	600'	Yellow/ Yellow/ Black	6,000	14,400
PPF2-5/8	2-5/8"	600'	Yellow/ Yellow/ Black	6,708	16,100
PPF33	3"	300'	Yellow/ Yellow/ Black	8,550	20,520
PPF3	3"	600'	Yellow/ Yellow/ Black	8,550	20,520
PPFB1-1/2	1-1/2"	600'	Black	2,279	5,470
PPFB2	2"	600'	Black	3,900	9,360
PPF2RWB	2"	600'	Red/ White/ Blue	3,900	9,360
PPF7/16W	7/16"	600'	White	263	630
PPFT1/4	1/4"	600'	Tan	94	225
PPFT1/412	1/4"	1,200'	Tan	94	225
PPFT5/16	5/16"	600'	Tan	143	342
PPFT3/8	3/8"	600'	Tan	203	486
PPFT1/2	1/2"	600'	Tan	315	756
PPFT5/8	5/8"	600'	Tan	465	1,116
PPFT3/412	3/4"	1,200'	Tan	638	1,530

3-STRAND NYLON PLUS ROPE

3-strand twisted nylon plus is a nylon/polyester blend known for its elasticity and tremendous shock absorbing qualities. When new, nylon plus ropes can stretch up to 20 - 25% of their length before breaking. Stretch characteristics will reduce relative to the amount of use and can lose 10% of its tensile strength when wet. It has good abrasion resistance, is rot proof, resists oil, gasoline, and most chemicals. It has good resistance to UV rays. Nylon plus will last 4-5 times longer than natural fibers.

Categories: Ropes and Cordages, 3-Strand Nylon Plus Rope

Key Features

Available Colors: White and Black

Additional sizes and colors available to special order

Standard reels of 300 ft., 600 ft. and 1,200 ft.

Excellent for shock load and high energy absorption applications.

Specific Gravity 1.14.



Part #	Diameter	Length	Color	Working Load Limits Range (WLL) (lbs.)	
				Min	Max
N3/16	3/16"	600'	White	73	176
N1/4	1/4"	600'	White	122	294
N1/412	1/4"	1,200'	White	122	294
N5/16	5/16"	600'	White	191	459
N3/83	3/8"	300'	White	270	648
N3/8	3/8"	600'	White	270	648
N3/812	3/8"	1,200'	White	270	648
N1/23	1/2"	300'	White	473	1,134
N1/2	1/2"	600'	White	473	1,134
N1/212	1/2"	1,200'	White	473	1,134
N5/83	5/8"	300'	White	743	1,782
N5/8	5/8"	600'	White	743	1,782
N5/812	5/8"	1,200'	White	743	1,782
N3/41	3/4"	100'	White	1,065	2,556
N3/43	3/4"	300'	White	1,065	2,556
N3/4	3/4"	600'	White	1,065	2,556
N3/412	3/4"	1,200'	White	1,065	2,556
N7/8	7/8"	600'	White	1,440	3,456
N7/812	7/8"	1,200'	White	1,440	3,456
N13	1"	300'	White	1,853	4,446
N16	1"	600'	White	1,853	4,446
N112	1"	1,200'	White	1,853	4,446
N1-1/8	1-1/8"	600'	White	2,355	5,652
N1-1/43	1-1/4"	300'	White	2,903	6,966

Part #	Diameter	Length	Color	Working Load Limits Range (WLL) (lbs.)	
				Min	Max
N1-1/4	1-1/4"	600'	White	2,903	6,966
N1-1/49	1-1/4"	900'	White	2,903	6,966
N1-5/16	1-5/16"	600'	White	3,188	7,650
N1-1/23	1-1/2"	300'	White	4,050	9,720
N1-1/2	1-1/2"	600'	White	4,050	9,720
N1-1/29	1-1/2"	900'	White	4,050	9,720
N1-5/8	1-5/8"	600'	White	4,781	11,475
N1-3/4	1-3/4"	600'	White	5,513	13,230
N23	2"	300'	White	7,050	16,920
N26	2"	600'	White	7,050	16,920
N2-1/4	2-1/4"	600'	White	8,925	21,420
N2-1/23	2-1/2"	300'	White	10,950	26,280
N2-1/2	2-1/2"	600'	White	10,950	26,280
N2-5/8	2-5/8"	600'	White	12,000	28,800
N33	3"	300'	White	15,450	37,080
N36	3"	600'	White	15,450	37,080
N3/16B	3/16"	600'	Black	73	176
N1/4B	1/4"	600'	Black	122	294
N5/16B	5/16"	600'	Black	191	459
N3/8B	3/8"	600'	Black	270	648
N1/2B	1/2"	600'	Black	473	1,134
N5/8B	5/8"	600'	Black	743	1,782
N3/4B	3/4"	600'	Black	1,065	2,556
N16B	1"	600'	Black	1,853	4,446



brtmarine.com

800-725-3787

3-STRAND POLY DACRON COMBO ROPE



Polydac rope is made from a combination of polyester and polypropylene fibers and is an excellent, low cost, general utility rope. This economical, high strength rope has very low stretch properties, high abrasion resistance and is easily spliced. Additionally polydac has good dielectric properties. Used in construction and fishing industries.

Categories: Ropes and Cordages, 3-Strand Poly Dacron Combo Rope

Key Features

White with a colored tracer, White, Black, and Tan

Additional sizes and colors available to special order

Standard reels of 600 ft. and 1200 ft.

1/4" to 1-1/4" on reels.

1-1/2" to 3" in coils.

Part #	Special Type	Diameter	Length	Color	Working Load Limits Range (WLL) (lbs.)	
					Min	Max
PD1/4100		1/4"	100'	White with Red Tracer	100	240
PD1/4		1/4"	600'	White with Red Tracer	100	240
PD5/16		5/16"	600'	White with Red Tracer	156	374
PD3/8		3/8"	600'	White with Red Tracer	225	540
PD7/16		7/16"	600'	White with Red Tracer	292	700
PD1/2		1/2"	600'	White with Red Tracer	367	880
PD1/212		1/2"	1,200'	White with Red Tracer	367	880
PD9/16		9/16"	600'	White with Red Tracer	433	1,040
PD5/8		5/8"	600'	White with Red Tracer	508	1,220
PD5/812		5/8"	1,200'	White with Red Tracer	508	1,220
PD5/824		5/8"	2,400'	White with Red Tracer	508	1,220
PD3/4		3/4"	600'	White with Red Tracer	700	1,680
PD7/8		7/8"	600'	White with Red Tracer	927	2,225
PD1		1"	600'	White with Red Tracer	1,098	2,635
PD112		1"	1,200'	White with Red Tracer	1,098	2,635

Part #	Special Type	Diameter	Length	Color	Working Load Limits Range (WLL) (lbs.)	
					Min	Max
PD1-1/8		1-1/8"	600'	White with Red Tracer	1,360	3,265
PD1-1/4		1-1/4"	600'	White with Red Tracer	1,658	3,980
PD1-1/23		1-1/2"	300'	White with Red Tracer	2,354	5,650
PD1-1/2		1-1/2"	600'	White with Red Tracer	2,354	5,650
PD1-5/8		1-5/8"	600'	White with Red Tracer	2,746	6,590
PD1-3/4		1-3/4"	600'	White with Red Tracer	3,071	7,370
PD23		2"	300'	White with Red Tracer	4,004	9,610
PD2		2"	600'	White with Red Tracer	4,004	9,610
PD2-1/4		2-1/4"	600'	White with Red Tracer	4,996	11,990
PD2-1/2		2-1/2"	600'	White with Red Tracer	6,129	14,710
PD2-5/8		2-5/8"	600'	White with Red Tracer	6,721	16,130
PD33		3"	300'	White with Red Tracer	8,575	20,580
PD3		3"	600'	White with Red Tracer	8,575	20,580
PD5/16SL	Stageline	5/16"	600'	White with Orange Tracer	156	374
PD3/8SL	Stageline	3/8"	600'	White with Orange Tracer	225	540

3-STRAND POLY DACRON COMBO ROPE

Part #	Special Type	Diameter	Length	Color	Working Load Limits Range (WLL) (lbs.)	
					Min	Max
PD7/16SL	Stageline	7/16"	600'	White with Orange Tracer	292	700
PD1/2SL	Stageline	1/2"	600'	White with Orange Tracer	367	880
PD5/8SL	Stageline	5/8"	600'	White with Orange Tracer	508	1,220
PDCT1/4	California Combo	1/4"	600'	White with Orange Tracer	100	240
PDCT5/16	California Combo	5/16"	600'	White with Orange Tracer	156	374
PDCT3/8	California Combo	3/8"	600'	White with Orange Tracer	225	540
PDCT7/16	California Combo	7/16"	600'	White with Orange Tracer	292	700
PDCT1/2	California Combo	1/2"	600'	White with Orange Tracer	367	880
PDCT1/212	California Combo	1/2"	1,200'	White with Orange Tracer	367	880
PDCT9/16	California Combo	9/16"	600'	White with Orange Tracer	433	1,040
PDCT5/8	California Combo	5/8"	600'	White with Orange Tracer	508	1,220
PDCT5/812	California Combo	5/8"	1,200'	White with Orange Tracer	508	1,220
PDCT3/4	California Combo	3/4"	600'	White with Orange Tracer	700	1,680
PDCT7/8	California Combo	7/8"	600'	White with Orange Tracer	927	2,225
PDCT1	California Combo	1"	600'	White with Orange Tracer	1,098	2,635
PDCT1-1/8	California Combo	1-1/8"	600'	White with Orange Tracer	1,360	3,265
PDCT1-1/4	California Combo	1-1/4"	600'	White with Orange Tracer	1,658	3,980
PDCT1-1/2	California Combo	1-1/2"	600'	White with Orange Tracer	2,354	5,650
PDCT1-3/4	California Combo	1-3/4"	600'	White with Orange Tracer	3,071	7,370
PDCT2	California Combo	2"	600'	White with Orange Tracer	4,004	9,610
PD1/212BTR		1/2"	1,200'	White with Black Tracer	367	880
PD1/4W		1/4"	600'	White	100	240
PD3/8W		3/8"	600'	White	225	540
PD1/2W		1/2"	600'	White	367	880

Part #	Special Type	Diameter	Length	Color	Working Load Limits Range (WLL) (lbs.)	
					Min	Max
PD5/8W		5/8"	600'	White	508	1,220
PD3/4W		3/4"	600'	White	700	1,680
PD1W		1"	600'	White	1,098	2,635
PDB1/4		1/4"	600'	Black	100	240
PDB3/8		3/8"	600'	Black	225	540
PDB1/2		1/2"	600'	Black	367	880
PDB5/8		5/8"	600'	Black	508	1,220
PDB3/4		3/4"	600'	Black	700	1,680
PDB7/8		7/8"	600'	Black	927	2,225
PDB1		1"	600'	Black	1,098	2,635
PDB1-1/4		1-1/4"	600'	Black	1,658	3,980
PD1/4LT		1/4"	600'	Light Tan	100	240
PD3/8LT		3/8"	600'	Light Tan	225	540
PD1/2LT		1/2"	600'	Light Tan	367	880
PD5/8LT		5/8"	600'	Light Tan	508	1,220
PD3/4LT		3/4"	600'	Light Tan	700	1,680
PD1LT		1"	600'	Light Tan	1,098	2,635
PD1-1/4LT		1-1/4"	600'	Light Tan	1,658	3,980
PD1-1/2LT		1-1/2"	600'	Light Tan	2,354	5,650
PD2LT		2"	600'	Light Tan	4,004	9,610
PD5/8TF		5/8"	600'	White with Green Tracer	666	1,599
PD5/836TF		5/8"	3,600'	White with Green Tracer	666	1,599
PD3/4TF		3/4"	600'	White with Green Tracer	1,015	2,436
PD1TF		1"	600'	White with Green Tracer	1,374	3,298



MANILA ROPE

Manila rope is made from natural abaca fiber and has some advantages over synthetic fibers. It is not affected by heat, and has an excellent resistance to the sun's UV rays. Manila rope has low stretch and good abrasion resistance, but poor chemical resistance, and is subject to rot. Ideal for a low-cost general-purpose rope. Used in shipping, construction, agriculture and many other areas.

Categories: Ropes and Cordages, Manila Rope



Part #	Special Type	Diameter	Length	Color	Working Load Limits Range (WLL) (lbs.)	
					Min	Max
MAN1/450		1/4"	50'	Natural	45	108
MAN1/4		1/4"	600'	Natural	45	108
MAN1/412		1/4"	1,200'	Natural	45	108
MAN1/41250		1/4"	1,250'	Natural	45	108
MAN5/16		5/16"	600'	Natural	75	180
MAN5/16850		5/16"	850'	Natural	75	180
MAN3/8		3/8"	600'	Natural	101	243
MAN3/812		3/8"	1,200'	Natural	101	243
MAN1/2		1/2"	600'	Natural	199	477
MAN1/212		1/2"	1,200'	Natural	199	477
MAN5/8100		5/8"	100'	Natural	330	792
MAN5/8		5/8"	600'	Natural	330	792
MAN5/812		5/8"	1,200'	Natural	330	792
MAN3/450		3/4"	50'	Natural	405	972
MAN3/41		3/4"	100'	Natural	405	972
MAN3/43		3/4"	300'	Natural	405	972
MAN3/4		3/4"	600'	Natural	405	972
MAN3/412		3/4"	1,200'	Natural	405	972

Part #	Special Type	Diameter	Length	Color	Working Load Limits Range (WLL) (lbs.)	
					Min	Max
MAN7/8		7/8"	600'	Natural	578	1,386
MAN150		1"	50'	Natural	675	1,620
MAN11		1"	100'	Natural	675	1,620
MAN13		1"	300'	Natural	675	1,620
MAN1		1"	600'	Natural	675	1,620
MAN112		1"	1,200'	Natural	675	1,620
MAN1-1/8		1-1/8"	600'	Natural	900	2,160
MAN1-1/4125		1-1/4"	125'	Natural	1,013	2,430
MAN1-1/4		1-1/4"	600'	Natural	1,013	2,430
MAN1-1/412		1-1/4"	1,200'	Natural	1,013	2,430
MAN1-1/2125		1-1/2"	125'	Natural	1,388	3,330
MAN1-1/2		1-1/2"	600'	Natural	1,388	3,330
MAN250		2"	50'	Natural	2,325	5,580
MAN21		2"	100'	Natural	2,325	5,580
MAN2		2"	600'	Natural	2,325	5,580
MAN3		3"	600'	Natural	4,792	11,500
MAN1-1/41254S	4-Strand	1-1/4"	125'	Natural	1,013	2,430

SISAL ROPE



Our sisal rope is biodegradable, knots well, and low chemical resistance. Sisal rope is commonly used in the shipping industry for mooring small craft, lashing, and handling cargo. The strength and length make this choice popular.

Categories: Ropes and Cordages, Sisal Rope

Key Features

100% sisal

Biodegradable and recyclable

Bundling rope for home farming and shipping

Special uncoiled option is animal friendly

Part #	Special Type	Diameter	Length	Color
SRC1/450		1/4"	50'	Natural
SRC1/41		1/4"	100'	Natural
SR1/415		1/4"	1,500'	Natural
SR1/415OU	UNOILED	1/4"	1,500'	Natural
SR1/425		1/4"	2,500'	Natural
SR1/425OU	UNOILED	1/4"	2,500'	Natural
SR5/1617		5/16"	1,725'	Natural
SRC3/850		3/8"	50'	Natural
SRC3/8100		3/8"	100'	Natural
SR3/85		3/8"	500'	Natural
SR3/812		3/8"	1,200'	Natural
SR3/812OU	UNOILED	3/8"	1,200'	Natural
SR3/824OU	UNOILED	3/8"	2,400'	Natural
SRC1/250		1/2"	50'	Natural
SRC1/2100		1/2"	100'	Natural
SR1/26		1/2"	600'	Natural
SR1/20U	UNOILED	1/2"	600'	Natural
SR3/4		3/4"	600'	Natural
SR1370		1"	370'	Natural
SR16		1"	600'	Natural



brtmarine.com

800-725-3787

HOLLOW BRAID POLYPRO ROPE

Hollow braid polypropylene rope is a strong lightweight rope that floats in water, great abrasion resistance, spliceable and will not kink. This rope is great for pulling wires, life ring throw ropes, buoys, floating lines, tie-downs, and crowd control barriers.

- Standard Colors: Yellow and Black (additional colors available)
- Standard reels of 500 ft. and 1000 ft.

Categories: Ropes and Cordages, Hollow Braid Polypro Rope



Key Features

Does not mildew, rot, or deteriorate even if stored wet

Will not kink

Floats

Minimal stretch design for durability

Part #	Size	Diameter	Length	Color
HBPP3/16250	#6	3/16"	250'	Yellow
HBPP3/161	#6	3/16"	1,000'	Yellow
HBPP1/4	#8	1/4"	500'	Yellow
HBPP1/41	#8	1/4"	1,000'	Yellow
HBPP5/16	#10	5/16"	500'	Yellow
HBPP5/161	#10	5/16"	1,000'	Yellow
HBPP3/8	#12	3/8"	500'	Yellow
HBPP3/81	#12	3/8"	1,000'	Yellow
HBPP1/21	#16	1/2"	1,000'	Yellow
HBPPB1/4	#8	1/4"	500'	Black
HBPPB1/41	#8	1/4"	1,000'	Black
HBPPB5/16	#10	5/16"	500'	Black
HBPPB5/161	#10	5/16"	1,000'	Black

Part #	Size	Diameter	Length	Color
HBPPB3/8	#12	3/8"	500'	Black
HBPPB3/81	#12	3/8"	1,000'	Black
HBPPB1/2	#16	1/2"	500'	Black
HBPPB1/21	#16	1/2"	1,000'	Black
HBPPR3/81	#12	3/8"	1,000'	Red
HBPPW1/41	#8	1/4"	1,000'	White
HBPPBW1/43	#8	1/4"	300'	Blue/ White
HBPPGW1/41	#8	1/4"	1,000'	Aqua Green/ White
HBPPHCW1/41	#8	1/4"	1,000'	Hunter Green/ White
HBPPG1/41	#8	1/4"	1,000'	Light Aqua Green
HBPPHC1/41	#8	1/4"	1,000'	Hunter Green
HBPPG1/21	#16	1/2"	1,000'	Gold
HBPPG1-3/4		1-3/4"	500'	Gold

BULWARK SAFETY X KERNMANTLE STATIC ROPE



Our Bulwark Safety X Kernmantle Static Rope is a superior strength rope with low elongation and rotation. This smooth rope is commonly used for mountain climbing, cave exploration, arborist, rescue applications, and horizontal lifeline.

Categories: Ropes and Cordages, Bulwark Safety X Kernmantle Static Rope

Key Features

Excellent grip cover

Low Elasticity

NAFTA parallel twisted nylon core for superior strength

Soft and supple with excellent abrasion elements.

Balanced-Ply non-rotational inner core and outer sheath

Excellent UV and abrasion resistance

Good resistance to chemical

Specific gravity: 1.38 (sinks in water)

5:1 recommended working load

UL certified to NFPA 1983-2017 Technical Use

Part #	Diameter	Length	Color	Minimum Breaking Strength (lbs.)	Recommended Working Load (lbs.)
KMIII5/163	5/16"	300'	White with Blue Tracer	4,800	960
KMIII5/166	5/16"	600'	White with Blue Tracer	4,800	960
KMIII3/83	3/8"	300'	White with Blue Tracer	5,781	1,156
KMIII3/86	3/8"	600'	White with Blue Tracer	5,781	1,156
KMIII7/163	7/16"	300'	White with Blue Tracer	6,676	1,335
KMIII7/166	7/16"	600'	White with Blue Tracer	6,676	1,335
KMIII1/23	1/2"	300'	White with Blue Tracer	8,621	1,724
KMIII1/26	1/2"	600'	White with Blue Tracer	8,621	1,724
KMIII1/212	1/2"	1,200'	White with Blue Tracer	8,621	1,724



brtmarine.com

800-725-3787

3-STRAND MEGA ROPE



MEGA™
BLUE-3S

Mega Blue-3S™ is one of the strongest co-polymer ropes in the market today. The Sky-Blue fiber with two Red tracers have become the industry standard for high performance marine rope. Manufactured from high tenacity polyolefin yarns, Mega Blue-3S™ offers easy handling, high strength, excellent abrasion resistance and excellent UV characteristics. Custom order is available to match boat fleet colors per request.

Categories: Ropes and Cordages, Mega Rope

Key Features

- Super strength and easy handling
- Excellent UV and abrasion resistance
- High-performance marine rope
- No loss of strength when wet; and floats in water.
- Specific gravity 0.91.
- Available in a variety of put-ups, 3-strand, 8 braid and 12-strand

Part #	Special Type	Diameter	Length	Color	Minimum Breaking Strength (lbs.)	Working Load Limits Range (WLL) (lbs.)	
						Min	Max
MR5/1612		5/16"	1,200'	Blue with Red Tracer	2,820	235	564
MR3/8		3/8"	600'	Blue with Red Tracer	4,330	361	866
MR3/812		3/8"	1,200'	Blue with Red Tracer	4,330	361	866
MR7/16		7/16"	600'	Blue with Red Tracer	4,700	392	940
MR1/2		1/2"	600'	Blue with Red Tracer	6,240	520	1,248
MR5/8		5/8"	600'	Blue with Red Tracer	10,640	887	2,128
MR3/4		3/4"	600'	Blue with Red Tracer	12,200	1,017	2,440
MR3/412		3/4"	1,200'	Blue with Red Tracer	12,200	1,017	2,440
MR7/8		7/8"	600'	Blue with Red Tracer	18,780	1,565	3,756
MR1		1"	600'	Blue with Red Tracer	23,000	1,917	4,600
MR1-1/2		1-1/2"	600'	Blue with Red Tracer	44,400	3,700	8,880
MR1-3/4		1-3/4"	600'	Blue with Red Tracer	68,000	5,667	13,600
MR23		2"	300'	Blue with Red Tracer	83,500	6,958	16,700

"The true guide of life is to do what is right."

—Winston Churchill

3-STRAND MEGA ROPE

Part #	Special Type	Diameter	Length	Color	Minimum Breaking Strength (lbs.)	Working Load Limits Range (WLL) (lbs.)	
						Min	Max
MR2		2"	600'	Blue with Red Tracer	83,500	6,958	16,700
MR2-1/43		2-1/4"	300'	Blue with Red Tracer	110,000	9,167	22,000
MR2-1/4		2-1/4"	600'	Blue with Red Tracer	110,000	9,167	22,000
MR2-1/2		2-1/2"	600'	Blue with Red Tracer	115,500	9,625	23,100
MR3		3"	600'	Blue with Red Tracer	167,500	13,958	33,500
MR1/2PB		1/2"	2,400'	Pacific Blue with Red and Blue Tracer	6,240	520	1,248
MR9/16PB		9/16"	2,400'	Pacific Blue with Red and Blue Tracer	8,900	742	1,780
MRCT1/4	Mega California Truck	1/4"	600'	Green with Orange Tracer	1,650	138	330
MRCT5/16	Mega California Truck	5/16"	600'	Green with Orange Tracer	2,820	235	564
MRGCT3/8	Mega California Truck	3/8"	600'	Green with Orange Tracer	4,330	361	866
MRGCT1/2	Mega California Truck	1/2"	600'	Green with Orange Tracer	6,240	520	1,248
MR3/825		3/8"	2,500'	Yellow with Black Tracer	4,330	361	866
MR3/836		3/8"	3,600'	Yellow with Black Tracer	4,330	361	866
MO5/8		5/8"	600'	Orange with Blue Tracer	10,640	887	2,128
MR2O		2"	600'	Orange with Blue Tracer	83,500	6,958	16,700
MR2-1/2O		2-1/2"	600'	Orange with Blue Tracer	115,500	9,625	23,100
MR1/412BC		1/4"	1,200'	Black	1,650	138	330
MR5/1612BC		5/16"	1,200'	Black	2,820	235	564
PD2MP	Mega Plus Combo	2"	600'	White with Green Tracer	83,500	6,958	16,700
PD2-1/4MP	Mega Plus Combo	2-1/4"	600'	White with Green Tracer	120,000	10,000	24,000
PD2-1/2MP	Mega Plus Combo	2-1/2"	600'	White with Green Tracer	142,000	11,833	28,400
PD2-5/8MP	Mega Plus Combo	2-5/8"	600'	White with Green Tracer	157,000	13,083	31,400
PD3MP	Mega Plus Combo	3"	600'	White with Green Tracer	180,000	15,000	36,000

"Things are not always right because they are hard, but if they are right one must not mind if they are also hard."

—Winston Churchill



brtmarine.com

800-725-3787

ENDURA 12



Endura 12 is very high strength, low stretch, and has low creep. It utilizes the latest ultra-high molecular weight polyethylene fiber in a 12-strand construction. This high-tech fiber and construction provide an extremely high strength, lightweight rope that is non-rotational and easily spliced. Endura 12 is ideally suited for wire rope replacement applications where size, strength, and stretch are the main design considerations. Applications include tug boat towlines, winch lines, tug pendant and mainline, helicopter lifting lines, trawl line, underground pulling lines and slings.

Categories: Ropes and Cordages, 12-Strand

Key Features

- Excellent abrasion resistance
- Easy to inspect
- Maximum strength to weight ratio
- Extremely low stretch

Part #	Special Type	Diameter	Circumference	Length	Color	Minimum Breaking Strength (lbs.)
ENDURAF00T1/8		1/8"	3/8"		Blue	2,800
ENDURAF00T3/16		3/16"	9/16"		Blue	6,050
ENDURA3/1612		3/16"	9/16"	1,200'	Blue	6,050
ENDURAF00T1/4		1/4"	3/4"		Blue	7,700
ENDURA1/46		1/4"	3/4"	600'	Blue	7,700
ENDURAF00T5/16		5/16"	1"		Blue	13,300
ENDURA5/166		5/16"	1"	600'	Blue	13,300
ENDURAF00T3/8		3/8"	1-1/8"		Blue	16,800
ENDURA3/86		3/8"	1-1/8"	600'	Blue	16,800
ENDURAF00T7/16		7/16"	1-1/4"		Blue	22,200
ENDURAF00T1/2		1/2"	1-1/2"		Blue	32,100
ENDURAF00T9/16		9/16"	1-3/4"		Blue	39,500
ENDURAF00T5/8		5/8"	2"		Blue	50,800
ENDURAF00T3/4		3/4"	2-1/4"		Blue	58,000
ENDURAF00T7/8		7/8"	2-3/4"		Blue	85,000
ENDURAF00T1		1"	3"		Blue	98,100
ENDURAF00T1-1/8		1-1/8"	3-1/2"		Blue	133,000
ENDURAF00T1-1/4		1-1/4"	3-3/4"		Blue	149,000
ENDURAF00T1-1/2		1-1/2"	4-1/8"		Blue	205,000
ENDURAF00T1-5/8		1-5/8"	5"		Blue	255,000
ENDURAF00T2		2"	6"		Blue	343,000

ENDURA 12

Part #	Special Type	Diameter	Circumference	Length	Color	Minimum Breaking Strength (lbs.)
ENDURAFooter2-1/4		2-1/4"	7"		Blue	483,000
ENDURAFooter2-1/2		2-1/2"	7-1/2"		Blue	529,000
ENDURAFooter2-5/8		2-5/8"	8		Blue	596,000
ENDURAFooter3		3"	9"		Blue	749,000
ENDURAFooter1R	SK78 - DYNEEMA	1"	3"		Red/Blue	98,100
ENDURAFooter1-1/8R	SK78 - DYNEEMA	1-1/8"	3-1/2"		Red/Blue	133,000
ENDURAFooter1-1/4R	SK78 - DYNEEMA	1-1/4"	3-3/4"		Red/Blue	149,000
ENDURAFooter1-5/16	SK78 - DYNEEMA	1-5/16"	4"		Red/Blue	166,000
ENDURAFooter1-1/2R	SK78 - DYNEEMA	1-1/2"	4-1/2"		Red/Blue	205,000
ENDURAFooter2R	SK78 - DYNEEMA	2"	6"		Red/Blue	343,000
ENDURAFooter2-1/4R	SK78 - DYNEEMA	2-1/4"	7"		Red/Blue	483,000
ENDURAFooter1-1/4O		1-1/4"	3-3/4"		Orange	149,000
ENDURABRAID1		1"	3"		White with tracer	98,100

"The inherent vice of capitalism is the unequal sharing of blessings; the inherent virtue of socialism is the equal sharing of miseries."

—Winston Churchill



BEXCO 12



BEXCO

Bexco 12 strand braided ropes are made of HMPE with improved abrasion resistance, very high strength, and low weight to diameter ratio. This 12 strand HMPE is easy to handle and operate with comparable to steel wire rope characteristics. Common sectors are bulk carriers, container ships, fishing vessels (nets), and passenger ships.

Categories: Ropes and Cordages, 12-Strand

Key Features

Good abrasion resistance

Temperature Resistance: 70°C max continuous

Dry and Wet Conditions: Wet strength equals dry strength

Master Reels

Made in Belgium

Part #	Diameter	Circumference	Color	Minimum Breaking Strength (lbs.)
BEXCO12FOOT1-1/8	1-1/8"	3-1/2"	Blue	133,000
BEXCO12FOOT1-1/4	1-1/4"	3-3/4"	Blue	149,000

"I contend that for a nation to try to tax itself into prosperity is like a man standing in a bucket and trying to lift himself up by the handle."

—Winston Churchill

HYPER-XII™

HYPER-XII™ is our high strength, low creep, and low weight to diameter 12 strand HMPE. By strategically combining small diameters with high breaking strength our proprietary HMPE, HYPER-XII™ rope is ABS certified to provide the best performance. HYPER-XII™ is commonly used in sectors like passenger and container ships, bulk carriers, LNG and LPG carrier barges, tugs, harbor towing, dredgers, and fishing vessels and nets. Additionally, a specific gravity of 0.975 allows it to float making it very useful in a marine environment.

Categories: Ropes and Cordages, 12-Strand

Key Features

- 12-Strand Braided Rope Made of HMPE
- Excellent Chemical Resistance
- Commonly Known as HMPE: High Modulus PolyEthylene
- Superior Abrasion Resistance
- Very High Strength with Low Weight to Diameter Ratio
- Easy in Handling and Operation
- Comparable to Steel Wire Characteristics
- Made in Belgium



Part #	Diameter	Circumference	Color	Minimum Breaking Strength (lbs.)
HYPER12FOOT3/16	3/16"	9/16"	Blue	4,900
HYPER12FOOT1/4	1/4"	3/4"	Blue	7,700
HYPER12FOOT5/16	5/16"	1"	Blue	12,300
HYPER12FOOT3/8	3/8"	1-1/8"	Blue	17,600
HYPER12FOOT1/2	1/2"	1-1/2"	Blue	30,600
HYPER12FOOT9/16	9/16"	1-3/4"	Blue	36,500
HYPER12FOOT5/8	5/8"	2"	Blue	47,500
HYPER12FOOT3/4	3/4"	2-1/4"	Blue	58,000
HYPER12FOOT7/8	7/8"	2-3/4"	Blue	81,700
HYPER12FOOT1	1"	3"	Blue	98,100
HYPER12FOOT1-1/8	1-1/8"	3-1/2"	Blue	133,000
HYPER12FOOT1-1/4	1-1/4"	3-3/4"	Blue	149,000
HYPER12FOOT15/16	1-5/16"	4"	Blue	166,000
HYPER12FOOT1-3/8	1-3/8"	4-1/8"	Blue	185,000
HYPER12FOOT1-1/2	1-1/2"	4-1/2"	Blue	205,000
HYPER12FOOT1-5/8	1-5/8"	5"	Blue	255,000

Part #	Diameter	Circumference	Color	Minimum Breaking Strength (lbs.)
HYPER12FOOT1-3/4	1-3/4"	5-1/2"	Blue	302,000
HYPER12FOOT2	2"	6"	Blue	343,000
HYPER12FOOT2-1/4	2-1/4"	7"	Blue	484,000
HYPER12FOOT2-1/2	2-1/2"	7-1/2"	Blue	529,000
HYPER12FOOT2-5/8	2-5/8"	8"	Blue	595,000
HYPER12FOOT3	3"	9"	Blue	749,000
HYPER12FOOT3-1/4	3-1/4"	10"	Blue	915,000
HYPER12FOOT4	4"	12"	Blue	1,270,000
HYPER12FOOT1/2O	1/2"	1-1/2"	Orange	30,600
HYPER12FOOT5/8O	5/8"	2"	Orange	47,500
HYPER12FOOT3/4O	3/4"	2-1/4"	Orange	58,000
HYPER12FOOT7/8O	7/8"	2-3/4"	Orange	81,700
HYPER12FOOT1O	1"	3"	Orange	98,100
HYPER12FOOT11/8O	1-1/8"	3-1/2"	Orange	133,000
HYPER12FOOT11/4O	1-1/4"	3-3/4"	Orange	149,000
HYPER12FOOT11/2O	1-1/2"	4-1/2"	Orange	205,000

"You must look at facts, because they look at you."

—Winston Churchill



brtmarine.com

800-725-3787

PERFORMANCE HMPE



Our heat-treated 12 strand rope with polyurethane coating is torque-free that yields a maximum strength to weight ratio, with the same strength as steel wire rope of similar diameter. This HMPE rope is an excellent replacement for wire rope. Additionally, a specific gravity of 0.98 makes it very useful in a marine environment.

Categories: Ropes and Cordages, 12-Strand

Key Features

12-Strand Braided Rope Made of HMPE

Commonly Known as HMPE: High Modulus PolyEthylene

Superior Abrasion Resistance

Very High Strength with Low Weight to Diameter Ratio

Easy in Handling and Operation

Comparable to Steel Wire Characteristics

Made in China

Part #	Diameter	Circumference	Color	Minimum Breaking Strength (lbs.)
HMPEFOOT3/16	3/16"	9/16"	Blue	4,900
HMPE3/166	3/16"	9/16"	Blue	4,900
HMPEFOOT1/4	1/4"	3/4"	Blue	7,700
HMPE1/46	1/4"	3/4"	Blue	7,700
HMPEFOOT5/16	5/16"	1"	Blue	12,300
HMPE5/166	5/16"	1"	Blue	12,300
HMPEFOOT3/8	3/8"	1-1/8"	Blue	17,600
HMPEFOOT7/16	7/16"	1-1/4"	Blue	21,500
HMPEFOOT1/2	1/2"	1-1/2"	Blue	30,600
HMPEFOOT9/16	9/16"	1-3/4"	Blue	36,500
HMPEFOOT5/8	5/8"	2"	Blue	47,500
HMPEFOOT3/4	3/4"	2-1/4"	Blue	58,000
HMPEFOOT1-1/4	1-1/4"	3-3/4"	Blue	149,000
HMPEFOOT1-5/16	1-5/16"	4"	Blue	166,000

"Nourish your hopes, but do not overlook realities."

—Winston Churchill

FABRICATED PRODUCTS

Our skilled splicing facility offers rope assemblies and fabrication services. Along with superior customer service, Byrne, Rice and Turner provides you with professional consultation to care for your custom requirements. Other services such as inspection, testing and training services are also available.



Fabrication Service

- Custom synthetic rope fabrication and fittings
- Standard industry assemblies
- Soft eyes
- Hard eyes
- Hand dipped eyes
- Taglines
- Face lines
- Double braid pull-line
- Tethered Tools
- Coated chafe gear

Hardware

- Blue line thimbles
- Stainless thimbles
- Hawser thimbles
- Composite thimbles

Ropes

- 12-strand HMPE ropes
- 12-strand polyester ropes
- 8-strand Mooring ropes
- 12-strand Mooring ropes
- Double braid ropes
- 3-strand ropes

"If you're going through hell, keep going."

—Winston Churchill



brtmarine.com

800-725-3787

8-STRAND BLUE DANLINE W/6' CANVAS COVERED EYES BOTH ENDS



8-strand high strength danline mooring lines, used for mooring larger vessels. These ropes have a high strength to weight ratio, float and do not absorb water. Additionally, they have high resistance to abrasion and chemicals. All our mooring lines are supplied with 6-foot covered eyes on both ends and come with either ABS or Lloyds certificates.

Categories: Ropes and Cordages, Mooring Lines/Tails

Key Features

Available colors: Blue


Standard coils of 720 ft.

Part #	Circumference	Diameter	Length	Color	Minimum Breaking Strength (lbs.)	Working Load Limits Range (WLL) (lbs.)	
						Min	Max
ML5	5"	1-5/8"	720'	Blue	43,477	3,623	8,695
ML6	6"	2"	720'	Blue	63,580	5,298	12,716
ML7PP	7"	2-1/4"	720'	Blue	73,865	6,155	14,773
ML7-1/2	7-1/2"	2-1/2"	720'	Blue	85,085	7,090	17,017
ML8PP	8"	2-5/8"	720'	Blue	97,240	8,103	19,448
ML9PP	9"	3"	720'	Blue	126,310	10,526	25,262
ML10PP	10"	3-1/4"	720'	Blue	158,015	13,168	31,603
ML12	12"	4"	720'	Blue	233,750	19,479	46,750

"You have enemies? Good. That means you've stood up for something, sometime in your life."

— Winston Churchill

8-STRAND X2 BLUE DANLINE W/6' CANVAS COVERED EYES BOTH ENDS

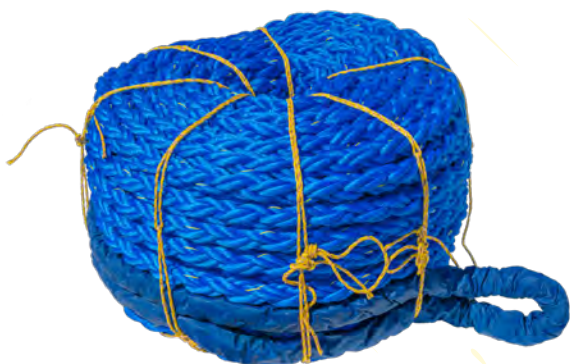

High Strength

8-strand high strength danline mooring lines, used for mooring larger vessels. These ropes have a high strength to weight ratio, float and do not absorb water. Additionally, they have high resistance to abrasion and chemicals. All our mooring lines are supplied with 6-foot covered eyes on both ends and come with either ABS or Lloyds certificates.

Categories: Ropes and Cordages, Mooring Lines/Tails

Key Features

Available colors: Blue

Standard coils of 720 ft.

Part #	Circumference	Diameter	Length	Color	Minimum Breaking Strength (lbs.)	Working Load Limits Range (WLL) (lbs.)	
						Min	Max
ML6X2	6"	2"	720'	Blue	101,853	8,488	20,371
ML7X2	7"	2-1/4"	720'	Blue	133,650	11,138	26,730
ML7-1/2X2	7-1/2"	2-1/2"	720'	Blue	152,700	12,725	30,540
ML8X2	8"	2-5/8"	720'	Blue	173,800	14,483	34,760
ML9X2	9"	3"	720'	Blue	217,360	18,113	43,472
ML10X2	10"	3-1/4"	720'	Blue	266,860	22,238	53,372

"You will never get to the end of the journey if you stop to shy a stone at every dog that barks."

—Winston Churchill



brtmarine.com

800-725-3787

8-STRAND MAXIFLEX GOLD W/6' CANVAS COVERED EYES BOTH ENDS

8-strand high strength polyester/polypropylene blended mooring lines, used for mooring larger vessels. OCIMF approved for use with oil tankers. These ropes have a higher strength to weight ratio than regular mooring lines and they float. All our mooring lines are supplied with 6-foot covered eyes on both ends and come with either ABS or Lloyds certificates.

Categories: Ropes and Cordages, Mooring Lines/Tails



Key Features

Available colors: White

Standard coils of 720 ft.

Part #	Circumference	Diameter	Length	Color	Minimum Breaking Strength (lbs.)	Working Load Limits Range (WLL) (lbs.)	
						Min	Max
ML5MFG	5"	1-5/8"	720'	White with Gold Tracer	79,380	6,615	15,876
ML6MFG	6"	2"	720'	White with Gold Tracer	116,800	9,733	23,360
ML7MFG	7"	2-1/4"	720'	White with Gold Tracer	160,900	13,408	32,180
ML7-1/2MFG	7-1/2"	2-1/2"	720'	White with Gold Tracer	176,000	14,667	35,200
ML8MFG	8"	2-5/8"	720'	White with Gold Tracer	196,000	16,333	39,200
ML9MFG	9"	3"	720'	White with Gold Tracer	250,800	20,900	50,160
ML10MFG	10"	3-1/4"	720'	White with Gold Tracer	297,000	24,750	59,400
ML12MFG	12"	4"	720'	White with Gold Tracer	418,950	34,913	83,790

"Courage is what it takes to stand up and speak. Courage is also what it takes to sit down and listen."

—Winston Churchill

8-BRAID X2 ULTIMA W/6' CANVAS COVERED EYES BOTH ENDS

8-strand high strength polyester/polypropylene blended mooring lines, used for mooring larger vessels. OCIMF approved for use with oil tankers. These ropes have a higher strength to weight ratio than regular mooring lines and they float. All our mooring lines are supplied with 6 ft. covered eyes on both ends and come with either ABS or Lloyds certificates.

Categories: Ropes and Cordages, Mooring Lines/Tails



Key Features

Available colors: White

Standard coils of 720 ft.

Ultra High Strength

Part #	Circumference	Diameter	Length	Color	Minimum Breaking Strength (lbs.)	Working Load Limits Range (WLL) (lbs.)	
						Min	Max
ML6X2U	6"	2"	720'	White with Red and Blue Tracer	136,049	11,337	27,210
ML7X2U	7"	2-1/4"	720'	White with Red and Blue Tracer	178,605	14,884	35,721
ML7-1/2X2U	7-1/2"	2-1/2"	720'	White with Red and Blue Tracer	202,860	16,905	40,572
ML8X2U	8"	2-5/8"	720'	White with Red and Blue Tracer	226,454	18,871	45,291
ML9X2U	9"	3"	720'	White with Red and Blue Tracer	289,076	24,090	57,815
ML10X2U	10"	3-1/4"	720'	White with Red and Blue Tracer	345,083	28,757	69,017

"A pessimist sees the difficulty in every opportunity; an optimist sees the opportunity in every difficulty."

—Winston Churchill



brtmarine.com

800-725-3787

12-STRAND MAXIFLEX-12 W/6' CANVAS COVERED EYES BOTH ENDS

12-strand high strength polyester/polypropylene blended mooring lines, used for mooring larger vessels. OCIMF approved for use with oil tankers. These ropes have a higher strength to weight ratio than regular mooring lines and they float. All our mooring lines are supplied with 6-foot covered eyes on both ends and come with either ABS or Lloyds certificates.

Categories: Ropes and Cordages, Mooring Lines/Tails

Key Features

Available colors: White

Standard coils of 720 ft.

Part #	Circumference	Diameter	Length	Color	Minimum Breaking Strength (lbs.)	Working Load Limits Range (WLL) (lbs.)	
						Min	Max
ML7F12	7"	2-1/4"	720'	White with Red Tracer	138,000	11,500	27,600
ML7-1/2F12	7-1/2"	2-1/2"	720'	White with Red Tracer	158,000	13,167	31,600
ML8F12	8"	2-5/8"	720'	White with Red Tracer	182,100	15,175	36,420
ML9F12	9"	3"	720'	White with Red Tracer	224,900	18,742	44,980
ML10F12	10"	3-1/4"	720'	White with Red Tracer	276,700	23,058	55,340

"You never can tell whether bad luck may not after all turn out to be good luck."

—Winston Churchill



MOORING QUICK REFERENCE GUIDE



Circumference	Minimum Breaking Strength (lbs.)					
	Danline	X2	Maxiflex Gold	X2 Ultima	12-Strand MaxiFlex	MaxiFlex Tail
5"	43,477	-	79,380	-	-	-
6"	63,580	101,853	116,800	136,049	-	-
7"	73,865	133,650	160,900	178,605	138,000	-
7-1/2"	85,085	152,700	176,000	202,860	158,000	-
8"	97,240	173,800	196,000	226,454	182,100	182,000
9"	126,310	217,360	250,800	289,076	224,900	224,900
10"	158,015	266,860	297,000	345,083	276,700	275,000
12"	233,750	-	418,950	-	-	407,000

"It is better to be making the news than taking it; to be an actor rather than a critic."

—Winston Churchill



brtmarine.com

800-725-3787

MAXIFLEX MOORING TAIL

8-strand high strength polyester/polypropylene blended mooring tails, used for mooring larger vessels. OCIMF approved for use with oil tankers. These ropes have a higher strength to weight ratio than regular mooring tails and they float. All our mooring tails come with either ABS or Lloyds certificates.

- 36 ft. long
- 3 ft. and 6 ft. Canvas Cover Eyes

Categories: Ropes and Cordages, Mooring Lines/Tails

Key Features

High Strength

Shock Load Absorption

36 ft. Tail Length

Canvas Covered Eyes



Part Number	Length	Eye Size	Circumference	Tensile	Working Load Limits Range (WLL) (lbs.)	
					Min	Max
MT8MT	36'	3' & 6'	8"	182,000	15,167	36,000
MT9MF	36'	3' & 6'	9"	224,900	18,742	44,980
MT10MF	36'	3' & 6'	10"	275,000	22,917	55,000
MT12MF	36'	3' & 6'	12"	407,000	33,917	81,400

"For myself I am an optimist—it does not seem to be much use being anything else."

—Winston Churchill

NYLON PLUS MOORING TAIL

8-Braid plaited nylon plus rope is a non-rotational rope that eliminates hocking and other problems associated with twisted anchor lines. Nylon plus is known for its elasticity and tremendous shock absorbing qualities. Other properties include good abrasion and UV resistance. Additionally, it resists oil, gasoline, and most chemicals.

- 36 ft. long
- 3 ft. and 6 ft. Canvas Cover Eyes

Categories: Ropes and Cordages, Mooring Lines/Tails



Key Features

High Strength

Shock Load Absorption

36 ft. Tail Length

Canvas Covered Eyes

Part Number	Length	Eye Size	Circumference	Working Load Limits Range (WLL) (lbs.)	
				Min	Max
MT9	36'	3' & 6'	9"	15,000	36,000
MT10	36'	3' & 6'	10"	19,583	47,000
MT12	36'	3' & 6'	12"	23,750	57,000

"Success is not final, failure is not fatal: it is the courage to continue that counts."

—Winston Churchill



brtmarine.com

800-725-3787

8-BRAID NYLON PLUS ROPE



8-Braid plaited nylon plus rope is a non-rotational rope that eliminates hocking and other problems associated with twisted anchor lines. Nylon plus is known for its elasticity and tremendous shock absorbing qualities. Other properties include good abrasion and UV resistance. Additionally, it resists oil, gasoline, and most chemicals. Ideal for use with windlass anchor lines.

Categories: Ropes and Cordages, 8-Braid Nylon Plus Rope

Key Features

Available colors: White

Standard coils of 720 ft.

Part #	Circumference	Length	Color	Working Load Limits Range (WLL) (lbs.)	
				Min	Max
N68B	6"	600'	White	5,917	14,200
N88B	8"	600'	White	12,000	28,800
N98B	9"	600'	White	15,000	36,000
N108B	10"	600'	White	16,667	40,000
N128B	12"	600'	White	25,833	62,000
N148B	14"	600'	White	32,250	77,400
N158B	15"	600'	White	37,917	91,000
N168B	16"	600'	White	37,917	91,000
N188B	18"	600'	White	45,000	108,000

"To be really happy and really safe, one ought to have at least two or three hobbies, and they must all be real."

—Winston Churchill

3-STRAND POLY DACRON BLACK BATTLE ROPE



Polydac rope is made from a combination of polyester and polypropylene fibers and is an excellent, low cost, general utility rope. This economical, high strength rope has very low stretch properties, high abrasion resistance and is easily spliced. Additionally polydac has good dielectric properties. Used in construction and fishing industries.

Categories: Ropes and Cordages, 3-Strand Poly Dacron Black Battle Rope

Key Features

- Black
- Additional sizes and colors available to special order
- Standard reels of 600 ft.

Part #	Circumference	Length	Color	Working Load Limits Range (WLL) (lbs.)	
				Min	Max
PDB1-1/2	1-1/2"	600'	Black	3,008	7,220
PD2B	2"	600'	Black	4,004	9,610

“I have in my life concentrated more on self-expression than self-denial.”
—Winston Churchill



SOLID BRAID

Our soft, high strength, lightweight solid braid rope is highly resistant to abrasion and mildew. This rope is suitable for agricultural, general-purpose utility, and leisure marine industries. It works well with tarps, flag poles, boat covers, awnings, and pulleys.

- Available Colors: White and Black (Special order colors available)
- Standard reels of 500 ft. and 1000 ft.

Categories: Ropes and Cordages, Solid Braid



Key Features

- High strength
- Flexible braided rope
- Excellent abrasion resistance

Part #	Circumference	Diameter	Length	Color	Working Load Limits Range (WLL) (lbs.)	
					Min	Max
SBN3/321	#3	3/32"	1,000'	White	33	80
SBN1/8	#4	1/8"	500'	White	42	100
SBN1/81	#4	1/8"	1,000'	White	42	100
SBN5/321	#5	5/32"	1,000'	White	56	134
SBN3/1650	#6	3/16"	50'	White	71	170
SBN3/16	#6	3/16"	500'	White	71	170
SBN3/161	#6	3/16"	1,000'	White	71	170
SBN7/321	#7	7/32"	1,000'	White	81	195
SBN1/450	#8	1/4"	50'	White	106	255
SBN1/4100	#8	1/4"	100'	White	106	255
SBN1/42	#8	1/4"	200'	White	106	255
SBN1/43	#8	1/4"	300'	White	106	255
SBN1/4	#8	1/4"	500'	White	106	255
SBN1/41	#8	1/4"	1,000'	White	106	255
SBN1/412	#8	1/4"	1,200'	White	106	255
SBN5/1650	#10	5/16"	50'	White	183	440
SBN5/16100	#10	5/16"	100'	White	183	440
SBN5/16175	#10	5/16"	175'	White	183	440
SBN5/16	#10	5/16"	500'	White	183	440
SBN5/161	#10	5/16"	1,000'	White	183	440
SBN3/850	#12	3/8"	50'	White	263	632

SOLID BRAID

Part #	Circumference	Diameter	Length	Color	Working Load Limits Range (WLL) (lbs.)	
					Min	Max
SBN3/8100	#12	3/8"	100'	White	263	632
SBN3/8125	#12	3/8"	125'	White	263	632
SBN3/83	#12	3/8"	300'	White	263	632
SBN3/8	#12	3/8"	500'	White	263	632
SBN3/81	#12	3/8"	1,000'	White	263	632
SBN3/812	#12	3/8"	1,200'	White	263	632
SBN3/85	#12	3/8"	5,000'	White	263	632
SBN7/16	#14	7/16"	500'	White	400	960
SBN7/161	#14	7/16"	1,000'	White	400	960
SBN1/280	#16	1/2"	80'	White	425	1,020
SBN1/23	#16	1/2"	300'	White	425	1,020
SBN1/2	#16	1/2"	500'	White	425	1,020
SBN1/21	#16	1/2"	1,000'	White	425	1,020
SBN5/8	#20	5/8"	500'	White	583	1,400
SBN5/81	#20	5/8"	1,000'	White	583	1,400
SBN1/8B	#4	1/8"	500'	Black	42	100
SBN1/81B	#4	1/8"	1,000'	Black	42	100
SBN5/321B	#5	5/32"	1,000'	Black	56	134
SBN3/16B	#6	3/16"	500'	Black	71	170
SBN3/161B	#6	3/16"	1,000'	Black	71	170
SBN1/4B	#8	1/4"	500'	Black	106	255
SBN1/41B	#8	1/4"	1,000'	Black	106	255
SBN5/16B	#10	5/16"	500'	Black	183	440
SBN5/161B	#10	5/16"	1,000'	Black	183	440
SBN3/8B	#12	3/8"	500'	Black	263	632
SBN3/81B	#12	3/8"	1,000'	Black	263	632
SBN7/16B	#14	7/16"	500'	Black	400	960
SBN7/161B	#14	7/16"	1,000'	Black	400	960
SBN1/2B	#16	1/2"	500'	Black	425	1,020
SBN1/21B	#16	1/2"	1,000'	Black	425	1,020
SBN5/8B	#20	5/8"	500'	Black	583	1,400



DOUBLE BRAID NYLON

Our double braid is high heat resistant and torque-free. It is designed to absorb sudden shock loads and generally used as an anchor, mooring, towing and dock lines. A must-have for securing a boat when not in use. Double Braid Polyester also available in the below sizes.

- Available Colors: White
- Standard reels of 600 ft., 1200 ft., and Master reels

Categories: Ropes and Cordages, Double Braid Nylon



Key Features

- High strength and abrasion resistance
- Multi-Purpose
- Rot and mildew resistant
- Minimal stretch design for durability
- Nylon provides more stretch than polyester
- Double braid construction holds knots firmly in place
- Spliceable
- Perfect for yachting, dock lines, camping, and other outdoor applications

Part #	Diameter	Length	Color	Working Load Limits Range (WLL) (lbs.)	
				Min	Max
DBN1/4	1/4"	600'	White	167	400
DBN5/16	5/16"	600'	White	263	630
DBN3/8	3/8"	600'	White	367	880
DBN3/812	3/8"	1,200'	White	367	880
DBN1/2	1/2"	600'	White	650	1,560
DBN1/212	1/2"	1,200'	White	650	1,560
DBN5/8	5/8"	600'	White	1,017	2,440
DBN5/812	5/8"	1,200'	White	1,017	2,440
DBN3/4	3/4"	600'	White	1,446	3,470
DBN3/41	3/4"	1,000'	White	1,446	3,470
DBN3/412	3/4"	1,200'	White	1,446	3,470
DBN7/8	7/8"	600'	White	1,950	4,680
DBN7/812	7/8"	1,200'	White	1,950	4,680
DBN1	1"	600'	White	2,521	6,050
DBN112	1"	1,200'	White	2,521	6,050
DBN1-1/8FT	1-1/8"	600'	White	3,150	7,560
DBN1-1/4FT	1-1/4"	600'	White	3,871	9,290
DBN1-1/2FT	1-1/2"	600'	White	5,500	13,200
DBN1-3/4FT	1-3/4"	600'	White	7,442	17,860
DBN2FT	2"	600'	White	9,692	23,260

COTTON SASH CORD



Our cotton sash cord is great general purpose rope. Common uses are repairing wooden windows, film industry, arts and crafts, awnings, hammocks, and draperies.

Categories: Ropes and Cordages, Cotton Sash Cord

Key Features

Forms tight, strong knots

Soft, extremely flexible

Mildew and rot resistant

Part #	Special Type	Size	Diameter	Length	Color	Working Load Limits Range (WLL) (lbs.)	
						Min	Max
SC1/848P	Polished	#4	1/8"	48'	Natural White	16	39
SC1/86		#4	1/8"	600'	Natural White	16	39
SC1/83P	Polished	#4	1/8"	3,000'	Natural White	16	39
SC3/161		#6	3/16"	100'	Natural White	20	48
SC1/4		#8	1/4"	100'	Natural White	63	150
SC1/46		#8	1/4"	600'	Natural White	63	150
SC1/41		#8	1/4"	1,000'	Natural White	63	150
SC1/412		#8	1/4"	1,200'	Natural White	63	150
SC5/161		#10	5/16"	100'	Natural White	100	240
SC5/166		#10	5/16"	600'	Natural White	100	240
SC5/1612P	Polished	#10	5/16"	1,200'	Natural White	100	240
SC3/81		#12	3/8"	100'	Natural White	123	295
SC3/86		#12	3/8"	600'	Natural White	123	295
SC3/812		#12	3/8"	1,200'	Natural White	123	295
SC1/21		#16	1/2"	100'	Natural White	142	340
SC1/848BP	Polished	#4	1/8"	48'	Black	16	39
SC1/85BP	Polished	#4	1/8"	500'	Black	16	39
SC1/86B		#4	1/8"	600'	Black	16	39
SC1/812BP	Polished	#4	1/8"	1,200'	Black	16	39
SC1/815BP	Polished	#4	1/8"	1,500'	Black	16	39
SC1/83BP	Polished	#4	1/8"	3,000'	Black	16	39
SC3/161B		#6	3/16"	100'	Black	20	48
SC1/41BP	Polished	#8	1/4"	100'	Black	63	150
SC1/412BP	Polished	#8	1/4"	1,200'	Black	63	150
SC5/161B		#10	5/16"	100'	Black	100	240
SC5/1612BP	Polished	#10	5/16"	1,200'	Black	100	240
SC3/81B		#12	3/8"	100'	Black	123	295
SC1/21BP	Polished	#16	1/2"	100'	Black	142	340



brtmarine.com

800-725-3787

3-STRAND COTTON ROPE

Our 3-strand cotton rope construction is a 65% cotton / 35% polyester blend produced using three cotton strands twisted together to make a soft, versatile, and dynamic rope. This rope is ideal for horse halters, livestock, lead ropes, hammocks, crafts, bag handles, and decorative projects. Exceptionally simple to tie and graft; makes this rope one of the most mainstream materials for creating versatile DIY crafts, hobbies, and home décor.

• Available lengths include: 300 ft., 600 ft., and 1200 ft.

Categories: Ropes and Cordages, Cotton Rope



Key Features

Environmentally friendly and biodegradable

Easy to work with

Soft to the touch

Part #	Diameter	Length	Color	Working Load Limits Range (WLL) (lbs.)	
				Min	Max
CR1/412	1/4"	1,200'	Natural White	35	84
CR3/8	3/8"	600'	Natural White	74	178
CR1/2	1/2"	600'	Natural White	121	290
CR5/8	5/8"	600'	Natural White	190	455
CR3/4	3/4"	600'	Natural White	258	620
CR13	1"	300'	Natural White	425	1,020
CR1	1"	600'	Natural White	425	1,020

"You must put your head into the lion's mouth if the performance is to be a success."

—Winston Churchill



PULL TAPE



Our premium polyester pull tape is lightweight, thin, and high strength resulting in enhanced efficiency and worker safety. This wide and flat profile is mostly used in small and almost impossible to reach ducts and conduits. Marked with printed measurements every foot, our premium pull tape is perfect for contractors. When pulling heavy cables, the construction of this cord protects it from heat and friction, preventing breaks.

- Available Colors: White
- Standard widths are 1/2", 5/8", and 3/4"
- Master reels of 3000 ft. to 5000 ft.

Categories:

Ropes and Cordages, Pull Tape

Key Features

- Low Stretch
- Abrasion Resistant
- High Strength

Part #	Width	Length
PULLTAPE1/2500	1/2"	500'
PULLTAPE121500	1/2"	1,500'
PULLTAPE123000	1/2"	3,000'
PULLTAPE585000	5/8"	3,000'
PULLTAPE583000	5/8"	5,000'
PULLTAPE341500	3/4"	1,500'
PULLTAPE343000	3/4"	3,000'
PULLTAPE345000	3/4"	5,000'

"The empires of the future are the empires of the mind."

—Winston Churchill



brtmarine.com

800-725-3787

POLY PULL LINE

Poly Pull Line is a heavy-duty pull-line available in either white with blue tracer or white with black tracer for easy identification. A continuous-fiber polyline can be blown directly into conduit. Pull-line features convenient packaging in a 4 gallon bucket with pre-punched top for easy access.

PHYSICAL PROPERTIES - Poly Pull Line 6500'

- Capacity: 210 lbs. average breaking strength
- Poly Line 6500' (1981.2m), Blue Tracer

PHYSICAL PROPERTIES - Poly Pull Line 2200'

- Capacity: 500 lbs. average breaking strength
- Poly Line 2200' (670.5m), Black Tracer

Categories: Ropes and Cordages, Twine

Key Features

- Ready-to-use, pre-punched hole in lid with resealable cap.
- Use with power fishing systems directly from the container.
- Resists tangling when dispensing.
- Rot and mildew resistant.
- Handy reusable plastic dispenser pail with handle keeps the line dry.
- Use to pull rope through conduit.

Part #	Color	Length	Tube Weight	Spec Tensile	Ft./Lb.
STTPAILS6500BW	Blue & White	6500 ft.	9 lbs.	210 lb. Avg.	723
STTPAILS2200BLW	Black & White	2200 ft.	9 lbs.	500 lb. Avg.	245



“One always measures friendships by how they show up in bad weather.”

—Winston Churchill

BUNGEE CORD

Our premium bungee cord with abrasion-resistant cover provides durable flexibility. The interlacing strands of polyester over rubber core provide elasticity and shock absorption that are ideal for securing loads on tractor-trailers, marine vessels, and outdoor activities.

- Available Colors: White with a Black Tracer, White, and Black
- Standard reels of 100 ft., 250 ft. and 500 ft.

Categories: Ropes and Cordages, Bungee Cord



Key Features

Master reel length

Universal

Flexible

Part #	Diameter	Length	Color
SBBUNGEE3/8	3/8"	100'	White with Black Tracer
SBBUNGEE1/2	1/2"	100'	White with Black Tracer
SBBUNGEE5/8	5/8"	100'	White with Black Tracer
BCW1/4250	1/4"	250'	White
BCW1/4500	1/4"	500'	White
BCW3/8250	3/8"	250'	White
BCW3/8500	3/8"	500'	White
BCW1/2250	1/2"	250'	White
BCW1/2500	1/2"	500'	White
BCBL1/4250	1/4"	250'	Black
BCBL1/4500	1/4"	500'	Black
BCBL3/8250	3/8"	250'	Black
BCBL3/8500	3/8"	500'	Black
BCBL1/2250	1/2"	250'	Black
BCBL1/2500	1/2"	500'	Black



brtmarine.com

800-725-3787

TREE ROPE



Grip Tight™ Tree Rope is manufactured from a proprietary blend of monofilament polypropylene joined with a spiral wrap. This produces a highly flexible and durable tree rope that will not fray when cut. Our lay-flat design will not damage tree bark, trunk or limbs. Grip Tight™ Tree Rope is more economical when compared to natural fiber rope. Our rope will not mildew, rot and is UV stabilized.

- Average Tube Weight: 4.2 lbs.
- Typical Tensile Strength: 620 lbs.

Categories: Twine

Key Features

Does not rot or mildew

UV stabilized

Part #	Length	Color	Case	Descriptions
TR620/955	955'	Black with orange spiral wrap	8 coils	TREE ROPE 955' EACH

“Success consists of going from failure to failure without loss of enthusiasm.”

—Winston Churchill



SISAL TWINE



Our Sisal twine is biodegradable, low chemical resistance, and knots well. Sisal twine is commonly used to secure large cartons, and bale heavy recycling. The strength and length make this general purpose twine popular.

· Natural Fiber

Categories: Twine

Key Features

100% sisal

Biodegradable and recyclable

Part #	Special Type	Length	Color	Case
ST1PLY	1 PLY	300'	Natural	10 rolls (10 lbs each)
ST2PLY	2 PLY	300'	Natural	10 rolls (10 lbs each)
ST3PLY	3 PLY	300'	Natural	10 rolls (10 lbs each)
SIST1360	1 PLY	360'	Natural	10 rolls (6 lbs each)
SIST2360	2 PLY	360'	Natural	10 rolls (6 lbs each)
ST2PLY50	2 PLY	300'	Natural	50 lb Reel
SIST2PLY480	2 PLY M/E	480'	Natural	90 lb Reel

"I never 'worry' about action, but only about inaction."

—Winston Churchill



brtmarine.com

800-725-3787

BRAIDED & TWISTED MASON SEINE TWINE

Mason Seine Twine is a general-purpose twine featuring excellent resistance to wear and tear and offers high tensile strength. Ideal for both indoor and outdoor applications and commonly used for crafting, camping, boating, surveying, mason line, chalk line, plumb line, fishing, hunting, survival, and marine industry. Sold by the case.

- Available as Twisted and Braided construction
- Available Colors: Yellow, Green, Orange, Pink, Fluorescent, and White (Special order colors available)

Categories: Twine



Key Features

Highly resistant to moisture, UV rays, chemicals, oil, and weather.

Will not degrade or lose strength in direct sunlight or submerged in water

Part #	Roll Weight	Size	Type	Colors	Case
N#181/4	1/4 lb	#18	Twisted	White	12
N#181/2	1/2 lb	#18	Twisted	White	12
N#181	1 lb	#18	Twisted	White	12
N#181/4FG	1/4 lb	#18	Twisted	Fluorescent Green	12
N#181G	1 lb	#18	Twisted	Green	12
N#181/4O	1/4 lb	#18	Twisted	Orange	12
N#181/2O	1/2 lb	#18	Twisted	Orange	12
N#181O	1 lb	#18	Twisted	Orange	12
N#181/4P	1/4 lb	#18	Twisted	Fluorescent Pink	12
N#181/2P	1/2 lb	#18	Twisted	Fluorescent Pink	12
N#181P	1 lb	#18	Twisted	Fluorescent Pink	12
N#181/4Y	1/4 lb	#18	Twisted	Yellow	12
N#181/4FY	1/4 lb	#18	Twisted	Fluorescent Yellow	12
N#181/2FY	1/2 lb	#18	Twisted	Fluorescent Yellow	12

Part #	Roll Weight	Size	Type	Colors	Case
N#181/2Y	1/2 lb	#18	Twisted	Yellow	12
N#181Y	1 lb	#18	Twisted	Yellow	12
N#181/4B	1/4 lb	#18	Braided	White	12
N#181B	1 lb	#18	Braided	White	12
N#181FLG	1 lb	#18	Braided	Fluorescent Green	12
N#181/4BG	1/4 lb	#18	Braided	Green	12
N#181BG	1 lb	#18	Braided	Green	12
N#181/4PB	1/4 lb	#18	Braided	Fluorescent Pink	12
N#181PB	1 lb	#18	Braided	Fluorescent Pink	12
N#181BP	1 lb	#18	Braided	Fluorescent Pink	12
N#181/2BFYB	1/2 lb	#18	Braided	Yellow	12
N#181/2BY	1/2 lb	#18	Braided	Yellow	12
N#181BY	1 lb	#18	Braided	Yellow	12

“To improve is to change, so to be perfect is to have changed often.”

—Winston Churchill



1172 Camp Street, New Orleans, LA 70130
 800-725-3787 | 504-525-7137
www.BRTMarine.com