
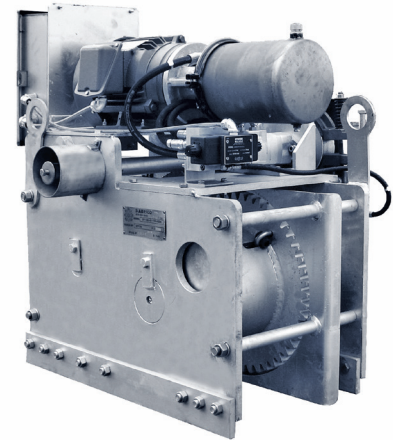


THE RIGHT CHOICE WHEN YOU NEED TO

POWER UP

DF-156 HYDRA-ELECTRIC WINCH

Features & Specifications

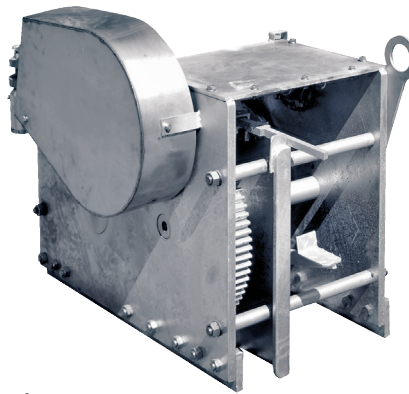

- Self-contained hydraulic / electric power unit with Stainless Steel tank.
- Winch operation can also be achieved by customer supplied hydraulic power or remote mounted power supply.
- Fail safe brake.
- Mechanical dog for emergency manual operation.
- Hot-dipped galvanized standard.
- Hydraulic system prevents power spikes.
- Free wheeling feature to allow faster cable pull-out.
- Stainless Steel components: control box, guards, tanks, and fasteners.
- Fully Synthetic Biodegradable Hydraulic fluid.
- True left or right hand models for use in pairs.

MODEL	HOLDING DOG & OR BRAKE	LINE PULL @ FIRST LAYER LINE PULL		DRUM CAPACITIES (FT.)				LINE SPEED	WEIGHT	DIMENSIONAL DATA		
	S. TONS	HYDRA ELECTRIC	HANDWHEEL ONE MAN	5/8"	3/4"	7/8"	1"	FPM	LBS	W	L	H
DF-156-10-6-HE	10 TONS	3,150 LBS AT 1,100 PS	7,000 LBS	174	129	—	—	23.5	897	11"	22"	47"
DF-156-20-7-HE	20 TONS	10,500 LBS AT 1,800 PSI	14,000 LBS	109	57	39	21	17.2	1,284	16"	30"	41"
DF-156-40-11-HE	40 TONS	23,000 LBS AT 1,800 PSI	15,000 LBS	287	176	130	84	12.8	1,930	22"	36"	40"
DF-156-60-11-HE	60 TONS	33,480 LBS AT 2,200 PSI	24,000 LBS	572	325	262	200	9.9	3,225	24"	47"	51"



NABRICO