


EVERYTHING YOU NEED FROM THE DECK UP

DF-156 MANUAL WINCH Features & Specifications

- All steel construction.
- High load release brake is a multi-disc system that incorporates all stainless steel moving parts.*
- Fastest acting and most powerful brake available.
- 4-bolt hub removable handwheel.
- Simpler heavy-duty ratchet assembly with no springs or levers.
- Bronze bushed bearings.
- Alemite fittings for proper lubrication.
- True left- and right-hand models for use in pairs.
- Blasted and painted, galvanized and other coatings available.
- Patented high load release dog with secondary anti-backlash drag brake that is activated automatically with the release of the dog.*
- Corrosion-resistant hardware.

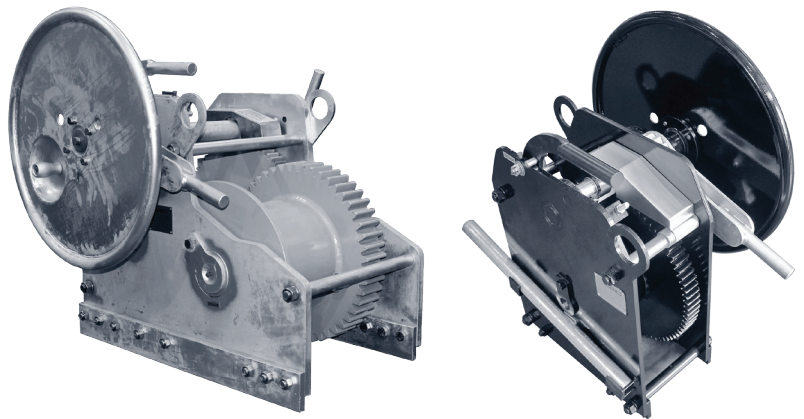

| MODEL NO. | HOLDING DOG & OR BRAKE | LINE PULL @ FIRST LAYER WITH ONE MAN (LBS) | | DRUM CAPACITIES (FT) | | | | | | WEIGHT LBS | DIMENSIONAL DATA | | | |
|-----------|------------------------|--------------------------------------------|---------------------|----------------------|------|------|------|-----|------|---------------|------------------|-----|-----|--|
| | | HAND WHEEL | RATCHET W/STD. EXT. | 1/2" | 5/8" | 3/4" | 7/8" | 1" | 1/8" | | W | L | H | |
| DF-156 | S. TONS | | | | | | | | | | | | | |
| 10-6-M | 10 | 3,000 | 7,000 | 328 | 195 | — | — | — | — | 500 | 19" | 21" | 41" | |
| 20-7-M | 20 | 8,000 | 19,000 | 223 | 137 | 79 | 67 | 33 | — | 850 | 33" | 30" | 34" | |
| 40-II-M | 40 | 8,000 | 17,800 | — | 340 | 219 | 132 | 115 | 60 | 1,250 | 42" | 36" | 39" | |
| 40-18-M | 40 | 8,000 | 17,800 | — | 563 | 366 | 224 | 198 | 107 | 1,350 | 49" | 36" | 39" | |
| 60-II-M | 60 | 24,000 | 28,800 | — | 618 | 448 | 322 | 225 | 151 | 2,100 | 45" | 49" | 45" | |
| 75-II-M | 75 | 24,000 | 28,800 | — | 618 | 448 | 322 | 225 | 151 | 2,800 | 45" | 49" | 45" | |

* Disc brake optional extra for 10-ton model.



NABRICO