


DF-1 N ELECTRIC WINCH Features & Specifications

- Salt water package standard on all power winches.
- Hot-dipped galvanized.
- Stainless or silicon bronze fasteners.
- 3-ply conveyer belt covers (damage and corrosion resistant).
- 3-tooth locking dog with large release and fail-safe disc brake.
- NEMA motor design with helical-bevel gearbox.
- Heaviest winch in its class.
- Variable frequency drive option available. Amp draw limits, variable speeds, and motor protection.
- Made as one model adjustable to true right or left hand models for use in pairs.
- Over IOO fewer parts than other electric winches (no chain or sprockets).
- 30 Ton 5 HP motor standard.
- 40 Ton 7.5 HP motor standard.
- 65 Ton 10 HP motor standard.

MODEL	HOLDING DOG & OR BRAKE	LINE PULL		LINE SPEED	DRUM CAPACITIES (FT)				WEIGHT
		@ RATED AMPS	@ MOTOR Stall	IST LAYER (FPM)	1/2"	5/8"	3/4"	1"	WEIGHT (LBS)
DF-1-30	30 TONS	7,495	23,234	21	361	228	138	66	1700
DF-1-40	40 TONS	10,140	30,420	23	-	287	180	100	1800
DF-1-65	65 TONS	24,310	77,791	13	-	572	325	200	3200





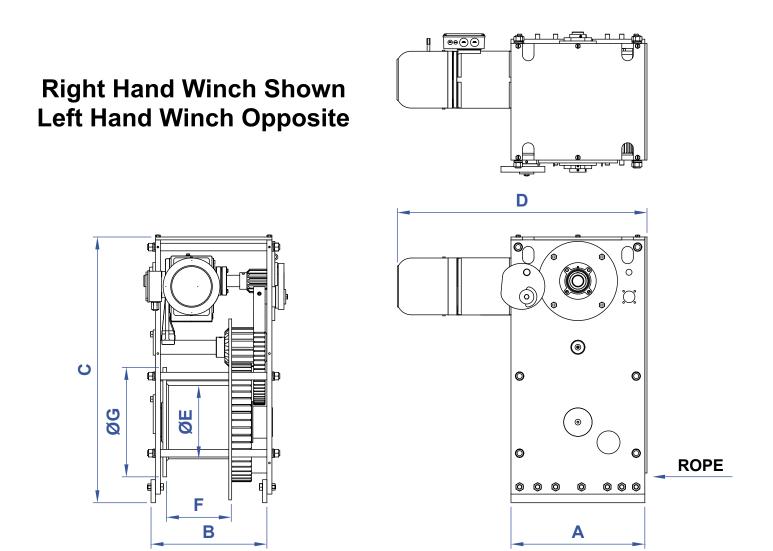

MODEL	Α	В	C	D	ØE	F	ØG
DF-1-30	22″	19-3/8″	39″	36″	10-3/4″	11-1/4″	16″
DF-1-40	23-1/4″	20-1/8″	46-1/8″	43-3/8″	12-3/4″	11-1/4″	19″
DF-1-65	30″	23-1/8″	55-1/2″	45-5/8″	14″	10-5/8″	24″

