


THE RIGHT CHOICE WHEN YOU NEED TO

POWER UP

DF-3 HAND WINCH Features & Specifications

- Patented high load release dog with secondary anti-backlash drag brake that is activated automatically with the release of the dog.
- High load release brake is a multi-disc system that incorporates all stainless steel moving parts.
- Fastest acting and most powerful brake available.
- 4 bolt lug removable handwheel.
- New simpler heavy duty ratchet assembly with no springs or levers.
- Totally enclosed drive train with the smallest deck foot print in the industry.
- Minimal maintenance.
- Easy to repair.
- All stainless steel and silicone bronze fasteners including separator rods.
- 3-ply conveyor belt covers (damage and corrosion-resistant).
- Saltwater package standard with 3-step paint system.
- Galvanized coating available.
- Heaviest winch in its class.
- True right and left hand models for use in pairs.

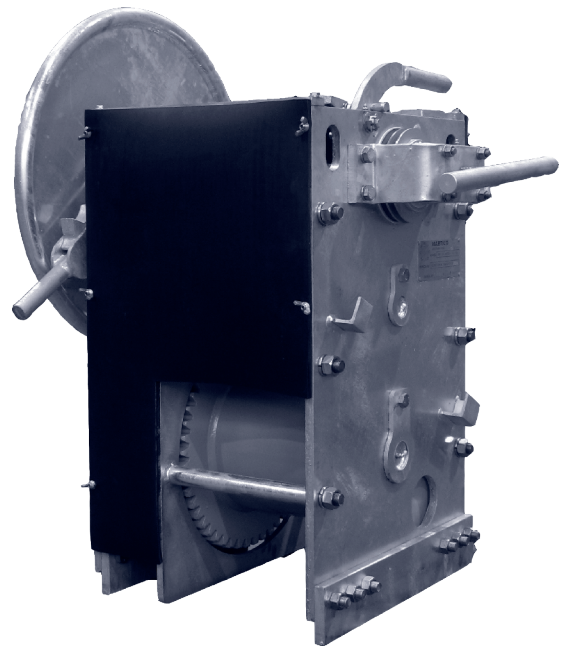

MODEL	MOUNT RIGHT/ LEFT	HOLDING DOG & OR BRAKE	LINE PULL @ FIRST LAYER		DRUM CAPACITIES (FT.)				WEIGHT	DIMENSIONAL DATA		
			HANDWHEEL ONE MAN	RACHET W/ STANDARD EXTENSION ONE MAN	5/8"	3/4"	7/8"	1"		W	L	H
DF-3-20/30	R/L	30 TONS	5,000	22,000	233	141	123	67	1,109	18-5/8	22	35-1/2
DF-3-40	R/L	40 TONS	5,000	19,000	285	173	150	83	1,567	19-1/2	23-1/4	43-1/2



NABRICO